


Straight Vacuum ejector EZU series

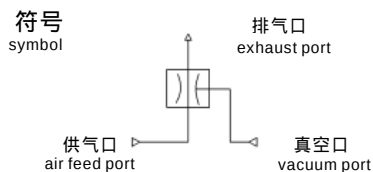


Specification

使用流体/Fluid	空气/Air
最高使用压力/Max pressure	0.6MPa
标准使用压力/Standard operating pressure	0.45MPa
流体及环境温度/Operating temperature	5 ~ 60
适用管子外径/Tube OD	φ6 (进气口及真空口) Air feed port and vacuum port

管道型设计，不需要特别安装
Union design, no special installation is required.
标准配有快换接头，接管方便
Easily joint, with standard quick release connector.
因采用树脂作材料，重量轻
Use resin material, with light weight body.
标准型号已经时铜规格
There is no brass model.


型号/model	类型/style	喷嘴/nozzle φ mm	最高真空压力/ max vacuum pressure kPa	最大吸入流量/ Max suction flow l/min(ANR)	空气消耗量/ air consumption L/min(ANR)
EZU05S	高真空型/ high vacuum type	0.5	-84	7	14
EZU07S		0.7	-84	10	29
EZU05L	大流量型/ max flow type.	0.5	-48	12	14
EZU07L		0.7	-48	16	29

Constructional Drawing

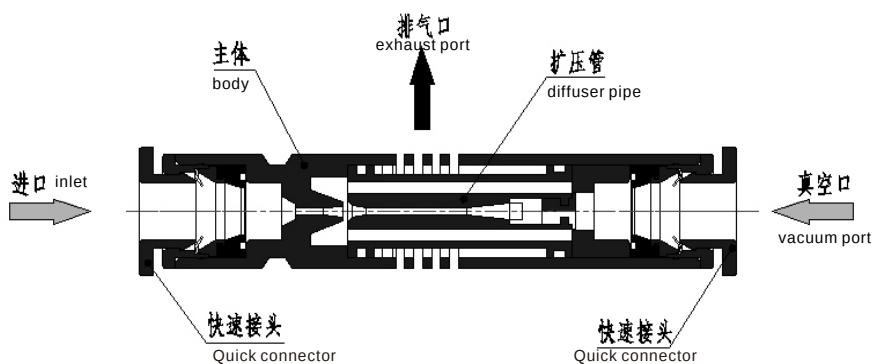


Dimensions

EZU05S, EZU05L

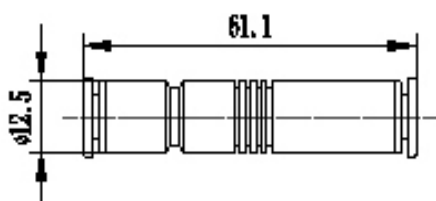

EZU07S, EZU07L

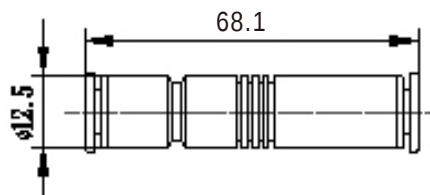


Exhaust characteristic/flow characteristic chart(the feed pressure is 0.47MPa)


EZU05S

EZU05L


排气特性:Exhaust characteristic

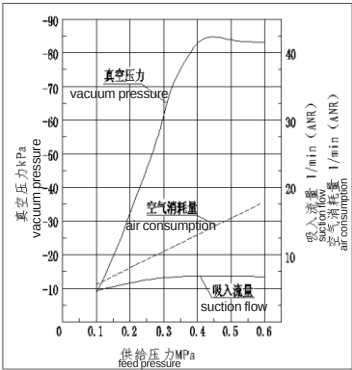


流量特性:flow characteristic

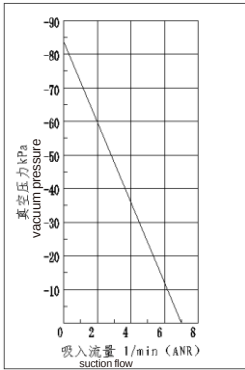

排气特性:Exhaust characteristic

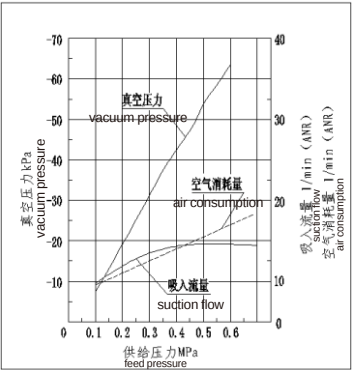


流量特性:flow characteristic

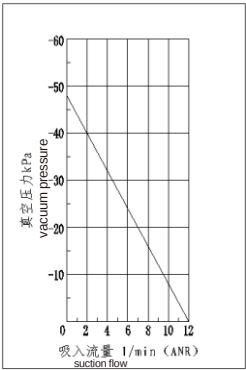


EZU07S

EZU07L


排气特性:Exhaust characteristic

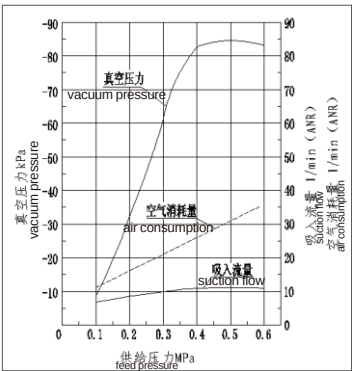

流量特性:flow characteristic

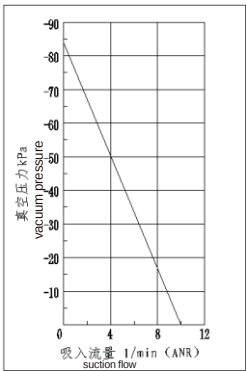

排气特性:Exhaust characteristic

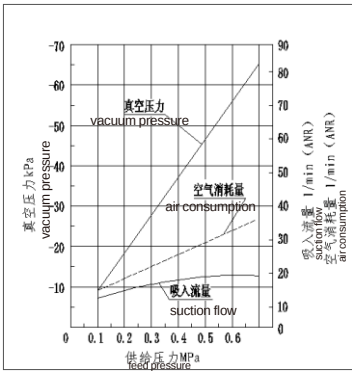

流量特性:flow characteristic

